



GREASE SEPARATOR NEW RANGE TECHNEAUSPHERE

*"A concentration
of innovations"*

NEW PRODUCT

Techneau

TRAPS AND SEPARATES GREASE FROM KITCHEN WASTE WATER

For in-ground installation

Minimal maintenance required



Flow ranges from 1-6l/s

Manufactured according
to EN 1825-1/2 standard

Robust watertight construction

Variable invert levels

Full customer support

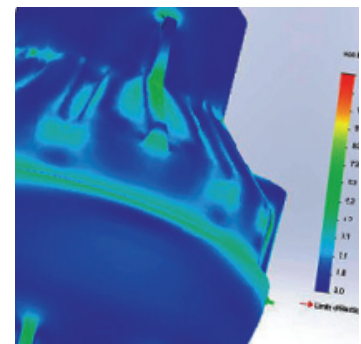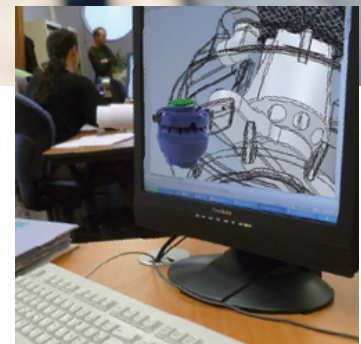

www.fmenvironmental.com







TECHNEAUSPHERE grease separator with sludge trap

YG05
Polyethylene
Ed 04 2015a



Description :

- Recyclable polyethylene tank produced by rotomoulding,
- PVC sleeve inlet / outlet,
- Pedestrian lockable cover.

Dimensions :

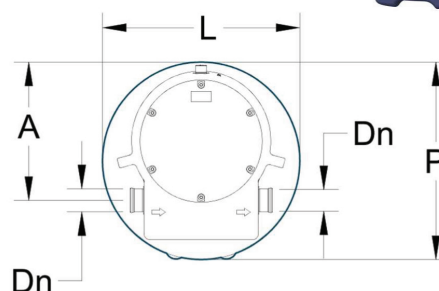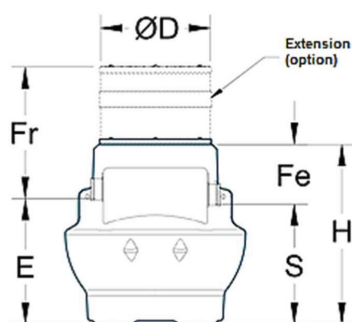

Ref.	Size (l/s)	P	L	H	E	S	Fe	Dn	A	Weight	Vol. sludge trap	Vol. separator	Ø D
YG0500E	1	1000	1000	1000	698	668	332	110	700	27	100	240	620

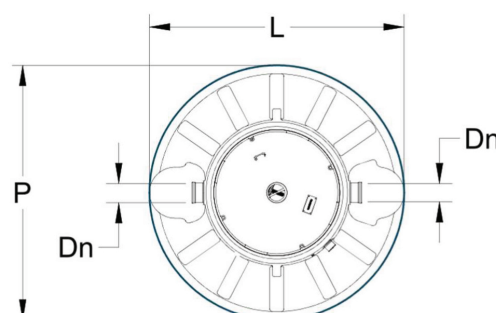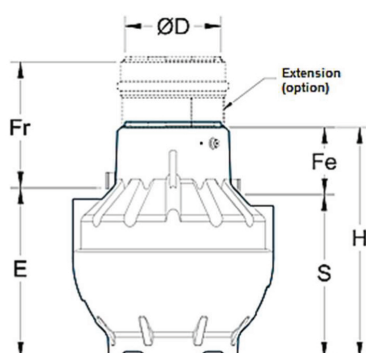

Ref.	Size (l/s)	P	L	H	E	S	Fe	Dn	Weight	Vol. sludge trap	Vol. separator	Ø D
YG0501E	1,5	1200	1200	1230	880	830	400	110	37	150	510	620
YG0502E	2	1200	1200	1230	930	880	350	110	37	200	490	620
YG0503E	3	1200	1200	1540	1240	1190	350	110	52	300	730	620
YG0504E	4	1500	1500	1700	1275	1225	475	110	69	400	1100	770
YG0505E	5	1500	1500	1700	1475	1425	275	160	72	500	1200	770
YG0506E	6	1500	1500	1965	1705	1655	310	160	95	600	1440	770

Dimensions in mm, weights in kg, volumes in l. Outlet level according to adjustable extension.
TECHNEAU is constantly improving its range, and as such reserves the right to modify without notice the dimensional characteristics of its products.



Official distributor for Ireland & Northern Ireland

FM Environmental
Greenbank Industrial Estate
Newry BT34 2QX
Northern Ireland
T: +44(0)28 302 66616
F: +44(0)28 302 63233
E: sales@greaseguardian.com
www.greaseguardian.com

